

# Reuter Stokes Helium-3 Filled Proportional Counter – RS-P4-0203-201

## product overview

### Neutron Time-of-Flight Spectroscopy and Small-Angle Scattering Measurements

#### Versatile Detector

This proportional counter is a versatile detector in a small envelope – ideal for applications requiring excellent angular resolution. With its high sensitivity, temperature capabilities and fast response time, the detector is suited for a wide range of applications from research to industrial.

#### High Neutron Sensitivity

With a standard fill pressure of 40 atmospheres of Helium-3, the counter provides high neutron sensitivity despite its small size.

#### Small Diameter

Detector diameter of 0.64 cm is a significant advantage in the  $\Delta t$  of the flight path length and angular resolution for neutron time-of-flight spectroscopy. The small diameter also provides short pulse risetime and jitter time.

#### High Temperature Rating

Maximum temperature rating of 150°C meets many of the requirements for geophysical and industrial applications.

#### Precision Performance


Helium-3 purification techniques and manufacturing process control were developed to ensure precise matching of operating characteristics among large batches of counters. This permits parallel operation of large numbers of detectors without need for separate power supplies or gain matching.

#### Product Configurations

Detectors are available in active lengths from 2.54 cm to 20.30 cm with stainless steel cathode material. Detectors also come with a 10 cm pigtail lead and polystyrene caps to protect end seals. Pigtail leads of other lengths or connection types are available for special order.

### Sample Specifications

This proportional counter is a sample of one of over 10,000 neutron counter designs we have manufactured. Please contact us if your application requires modification of the specifications given here.

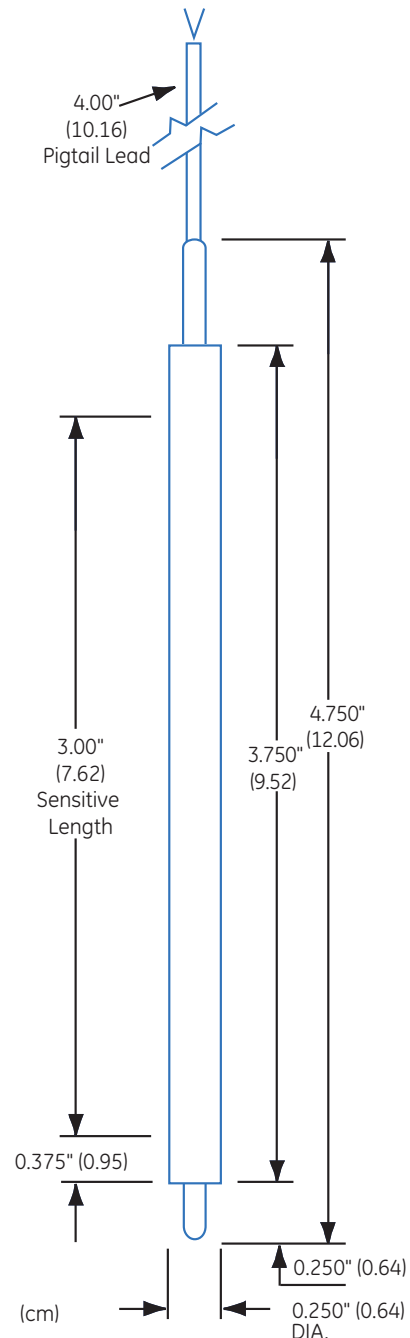

## Specifications

### Mechanical

- Maximum diameter: 0.68 cm
- Maximum overall length: 12.4 cm
- Connector type: 10.2 cm pigtail lead
- Net weight: 0.01 kg

### Material

- Outer shell: 304 Stainless Steel
- Insulation: Alumina ceramic
- Neutron sensitive material: Helium-3
- Fill pressure: 40 atm

### Capacitance

- 9 pf (detector only)

### Resistance @ 25°C

- $10^{12}$  ohms (minimum)

### Maximum Ratings

- Voltage: 3000 V
- Temperature (note 1): 150°C


### Operating Characteristics (note 2)

- Thermal neutron sensitivity (unperturbed): 2.6 cps/nv in 0 R/hr
- Thermal neutron flux range: to  $5 \times 10^6$  nv
- Voltage range: See plateau curve
- Resolution (FWHM): See spectrum
- Output pulse characteristics (average)
  - Charge output:  $2.7 \times 10^{-14}$  coulombs @ 2050 V


Note 1: Available with 200°C rating on special order.

Note 2: Approximate values may vary with gamma background and associated electronics.


### Typical Counting Arrangement

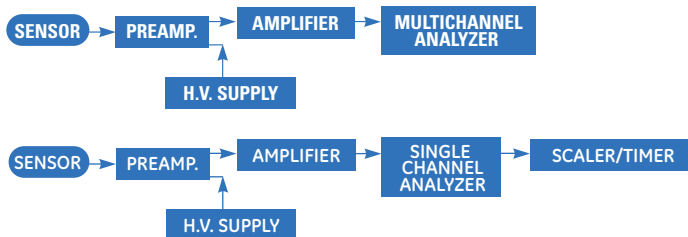

## 40 Atmosphere Helium-3 5 Curie Pu-Be Source (Moderated)

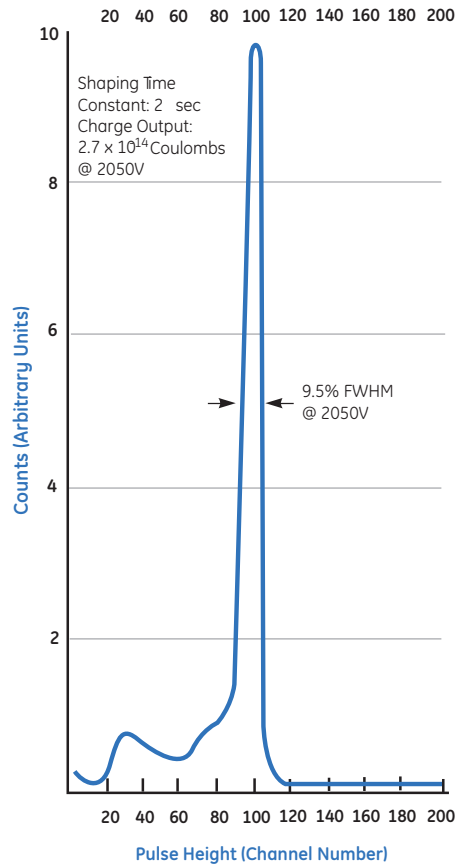

### Typical Plateau Curve

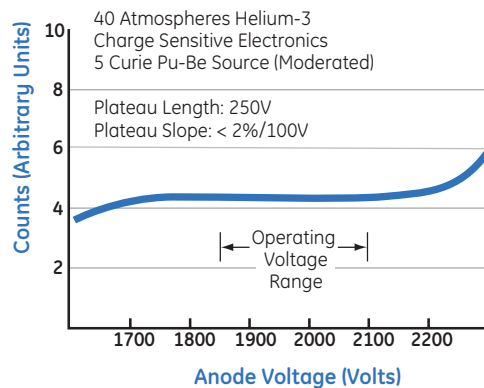

8499 Darrow Road  
Twinsburg, OH 44087  
Ph: 1 (330) 425-3755  
Ph: 1 (512) 251-4131  
E-mail: rsweb@ge.com  
gepower.com/reuterstokes

©2005, General Electric Company. All rights reserved. The contents of this document are the property of General Electric Company. No part of this work may be reproduced or transmitted in any form or by any means, except as permitted in written license agreement with General Electric Company. General Electric Company has made every reasonable attempt to ensure the completeness and accuracy of this document. However, the information contained in this document is subject to change without notice, and does not represent a commitment on the part of General Electric Company. The GE logo is a registered trademark of General Electric Company.